

## ProfiMaster - Art. No.:60 650 102

- » Robust quality
- » High capacity filter



### Applications

- » Also suitable for high-alloy steel
- » Low to medium levels of smoke and dust
- » Occasional to frequent use

### Benefits

- » Safe operation by rotation field control
- » Maintenance door allows easy filter change
- » Exhaust arm requires less adjustment due to exhaust hood design
- » Increased safety due to filter monitoring

### Properties

- » Automatic Start/Stop (optional)
- » Exhaust arm up to 4 m
- » Rotating exhaust hood





### Accessories

- » Automatic Start/Stop

### Technical Data

<b>Art. No</b>	<b>60 650 102</b>
<b>Filter</b>	
Filter stages	2
Filter method	Disposable filter
Filter surface	ca. 17 m <sup>2</sup>
Type of filter	Filter cassette
Filter material	Non-woven fibre
Filter efficiency	> 99.5 %
Filterclass	E12
Additional filters	Pre-filter
<b>Basic data</b>	
Extraction capacity	1,100 m <sup>3</sup> /h
Weight	105 kg
Motor power	1.1 kW
Power supply	3 x 400 V / 50 Hz
Rated current	2.3 A
Control voltage	24 V, DC
Noise level	70 dB(A)

<b>Additional information</b>	
IFA-Certification	W3-Approved
Fan type	Radial fan
Quantity of extraction arms	1
Exhaust arm type	flexible exhaust arm
Diameter extraction arm	150 mm
Length of exhaust arm	4 m

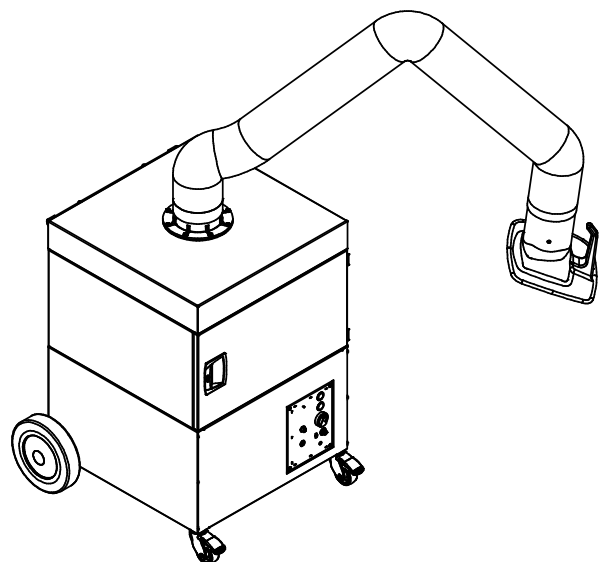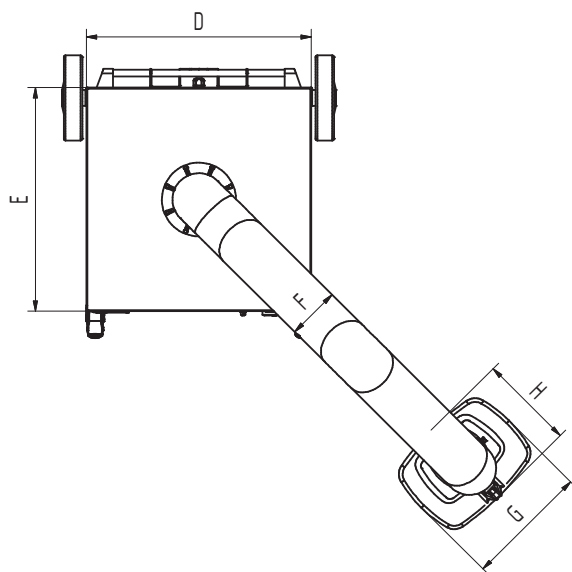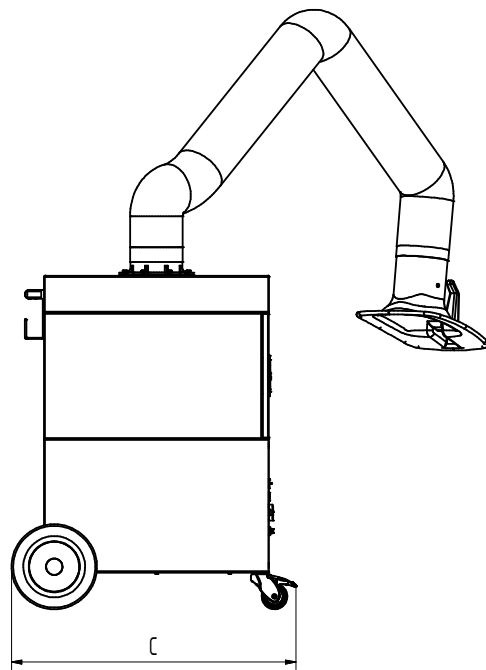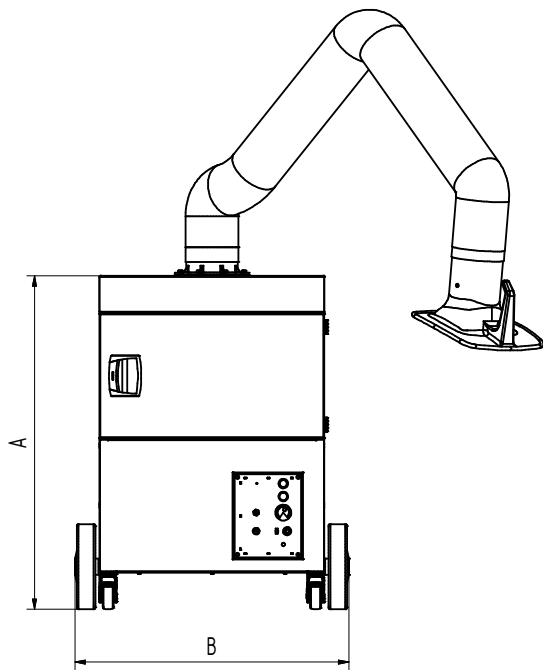

## Technical Data

### Dimensions

A	977 mm
B	797 mm
C	828 mm
D	655 mm
E	655 mm
F	150 mm
G	360 mm
H	295 mm