


Hydraulic Welding Positioner YHB

YHB positioners are the best solution for lifting, turning and tilting difficult workpieces. For automated welding, they have 2-cycle/4-cycle as well as start/stop signal for the welding device.



Hydraulic Welding Positioner YHB

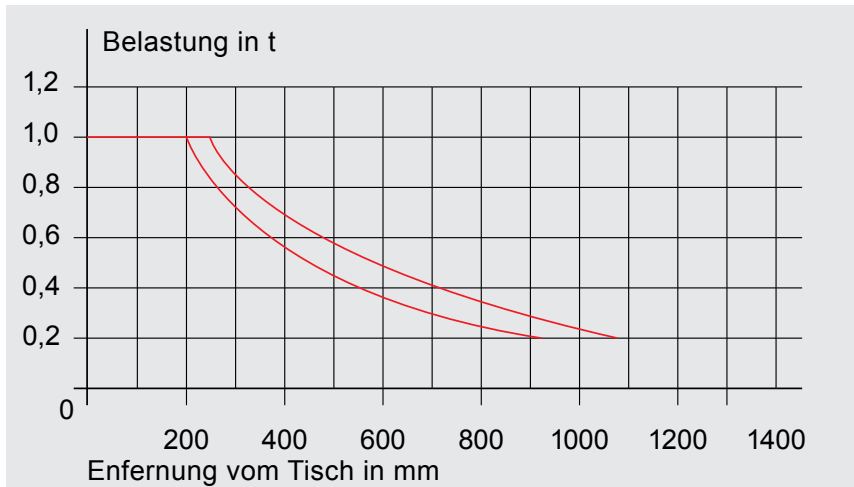

Load diagram,
example YHB 1

Model	YHB06	YHB1	YHB2	YHB3	YHB5	YHB10
Load capacity	0,6 t	1 t	2 t	3 t	5 t	10 t
Center of gravity load	250 mm	250 mm	250 mm	300 mm	300 mm	400 mm
Excentric load	200 mm	200 mm	200 mm	200 mm	200 mm	200 mm
Table diameter	900 mm	900 mm	1.000 mm	1.400 mm	1.500 mm	2.000 mm
Rotation motor power	0,37 Kw	0,75 Kw	0,75 Kw	1,1 kW	1,5 kW	3,0 kW
Table height from floor	599 – 1399 mm	599 – 1399 mm	699 – 1499 mm	788 – 1694 mm	815 – 1615 mm	1340 – 2678 mm
Rotating speed	0,1 – 1,0 u/min	0,1 – 1,0 u/min	0,1 – 1,0 u/min	0,05 – 0,5 u/min	0,05 – 0,5 u/min	0,05 – 0,5 u/min
Tilting angle	135°	135°	135°	135°	120°	130°
Size (LxWxH max in mm)	1400 x 1122 x 1500	1780 x 1142 x 1550	1600 x 1240 x 1650	2248 x 1480 x 1896	2709 x 1700 x 1855	3935 x 2000 x 2678
Hydraulic motor power	1,1 kW	1,1 kW	1,1 kW	1,5 kW	1,5 kW	3,0 kW
Hydraulic pressure	20 mpa	20 mpa	20 mpa	20 mpa	20 mpa	20 mpa



Product presentation
on www.javac.de.



Or on our YouTube chanel

Hydraulic Welding Positioner YHB



Hydraulic Welding Positioner YHB

Dimensions, example YHB 10

