

Technical Data

Rating at 60% duty cycle
(10 min. cycle)

- Mixed gas: 240 A
- CO₂: 270 A

Cooling method Gas cooling


Wire diameter 1.0 - 1.2 mm

Gas flow 12 l/min

Technical specification according to IEC 60974-7

Connection Euro-Central connector
Other connectors are available upon request.

Torch rating will be reduced when using pulsed-arc power sources.

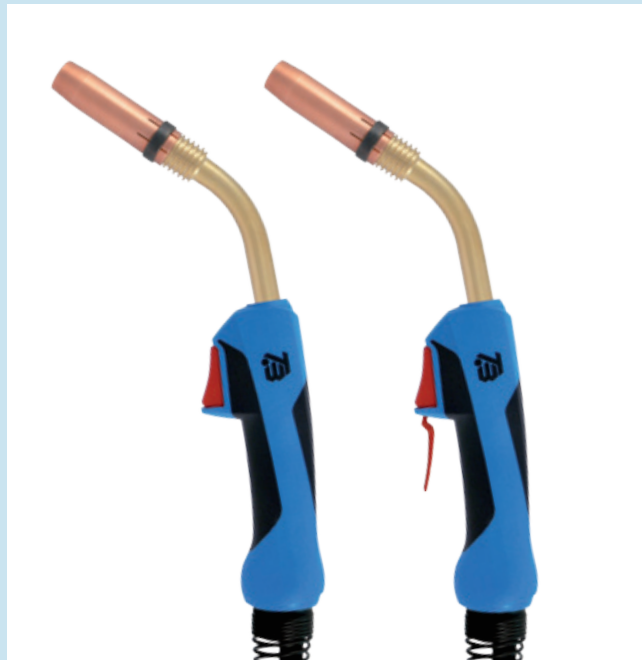

Contact tips

M6		Pos.	Part no.
		► 10 ECu, M6 x 28 CuCrZr, M6 x 28 Alu, ECu, M6 x 28	340P__1069* 340P__3069* 341P__1069*
M8		Pos.	Part no.
		11 ECu, M8 x 30 CuCrZr, M8 x 30 Alu, ECu, M8 x 30	340P__1262* 340P__3262* 341P__1262*

► = Standard equipment

* At the blank, please insert suitable information for torch length or wire diameter, e.g. 3 for 3 m or 08 for 0.8 mm.

Tip holders

	Pos.	Part no.
	► 20 for contact tip M6 for contact tip M6, 3 mm longer version	342P006018 342P006118
	Pos.	Part no.
	21 for contact tip M8	342P008018


Ordering information for torches

Supplied equipped for steel wire Ø 1.0 mm

TBi 260 Expert	with Euro central connector	3 m	118P321030
		4 m	118P321040
		5 m	118P321050
TBi 260 Expert	with Euro central connector and long trigger	3 m	118P3L1030
		4 m	118P3L1040
		5 m	118P3L1050

Spare parts

Pos.	Description	Part no.
50	Torch neck TBi 260, 50°	118P001020
51	PVC body	600P002018
60	Handle Expert cpl., gas cooled	380P230001
61	Handle Expert cpl., gas cooled, long trigger	380P230002
62	Screw for Expert handle	100P541101
63	Trigger, red, 2 poles	385P021016
64	Trigger, red, 2 poles, long	385P021018

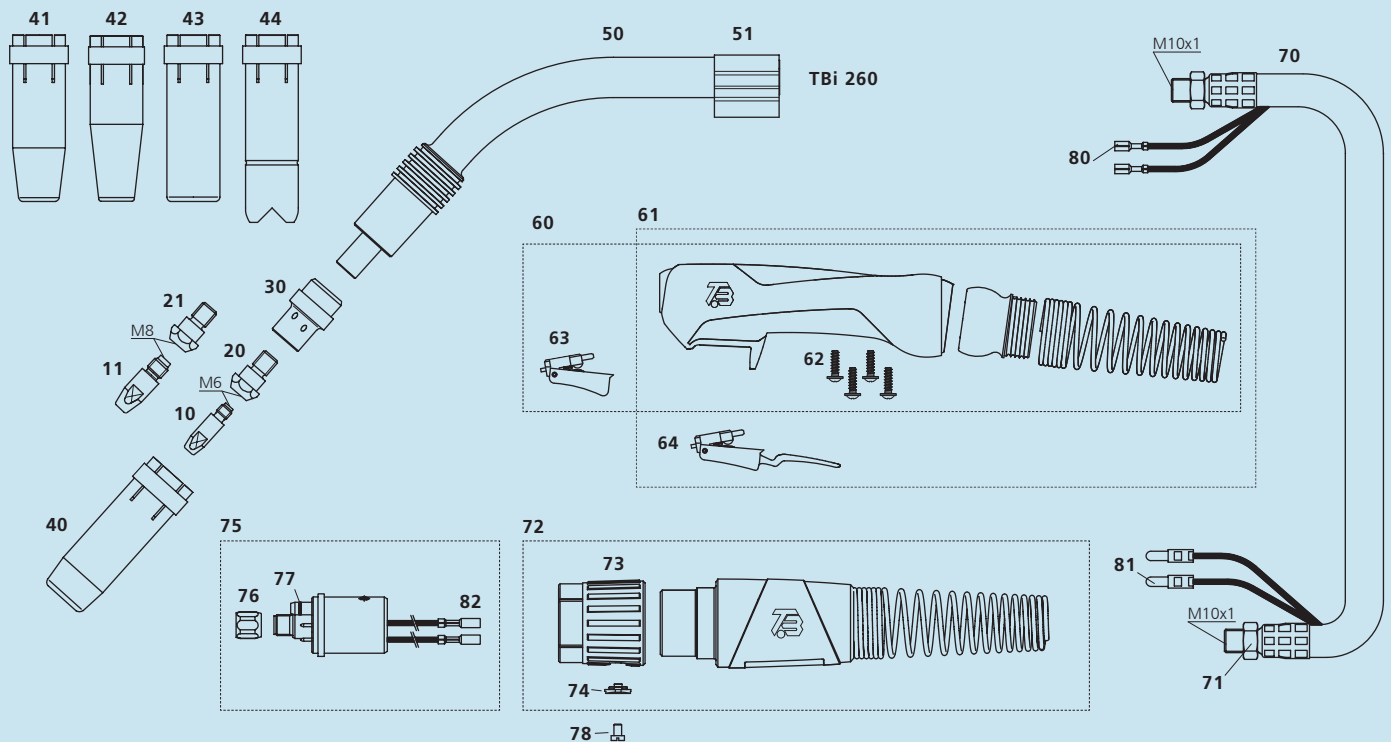


Gas diffuser



Pos.	Description	Part no.
30	thermoset, black, very robust	118P002021

Gas nozzle

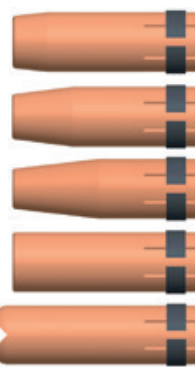

Pos.	Description	Part no.
40	conical, NW 16 mm L= 75.5 mm	345P012030
41	conical, NW 14 mm L= 75.5 mm	345P013030
42	conical, NW 12 mm only for M6 L= 75.5 mm	345P016030
43	cylindrical, NW 20 mm L= 75.5 mm	345P011030
44	spot welding nozzle NW 20 mm L= 85 mm	345P015030

Pos.	Description	Part no.
70	Coaxial cable TBi ProFlex ML	361PML11_0*
71	Hex nut M10x1	101P002005
72	Cable support Expert cpl., gas cooled	700P001064
73	Adaptor nut Expert	700P001010
74	Cap for adaptor nut Expert	700P002059
75	Central adaptor ESG cpl., 2 poles, moveable pins	701P001048
76	Sleeve nut M10x1	701P002005
77	O-ring 4.0x1.0 mm (gas nipple)	365P100040
78	Screw M4x6	100P008401

Pos.	Description	Part no.
80	Cable lug, flat	375P000023
81	Insulated connector, male, round	375P000004
82	Insulated connector, female, round	375P000003