

## MINI SPIDER | FILLET WELDING TRACTOR

The Mini Spider is a battery-powered welding tractor designed to produce continuous fillet welds using MIG/MAG torches. The torch can be easily swapped from one side of Mini Spider to another.


4-wheel drive system with magnetic traction and a feedback loop provides highly efficient speed stabilization. Constant, continuous and repeatable travel speed enables weld bead geometry that is exact to the required specifications, thus reducing costly over welding and substantially decreasing filler metal usage.

### Features and benefits:


- Compact and lightweight design to weld in narrow spaces
- Convenient 18 V DC battery supply (the same battery for both Mini Spider and Gecko Battery)
- Torch placement on either side
- Welding edge to edge
- Closed-loop speed control system based on electric motor with encoder – ensures increased speed accuracy
- Consistent heat input reduces distortion
- Reduces wasted filler metal – eliminates over welding
- Digital LED display for presetting of travel speed and diagnostic messages
- Low-battery indicator
- Built-in guide rollers



Torch placement on either side

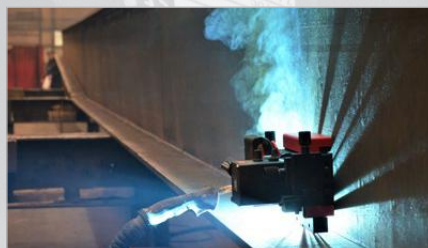

Welding edge to edge

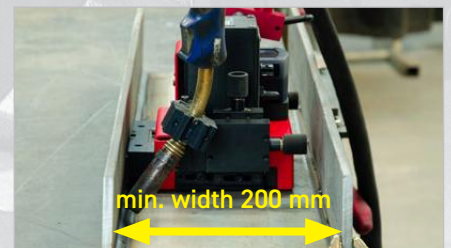

Welding in narrow spaces



Continuous welding



Horizontal speed  
0–110 cm/min



Vertical speed  
0–100 cm/min



Torch placement  
on either side




Welding in  
narrow spaces



Weight 7,6 kg

| MINI SPIDER Technical Specification                         |                                 |
|-------------------------------------------------------------|---------------------------------|
| Voltage                                                     | 18 V DC, 4.0 Ah                 |
| Power                                                       | 25 W                            |
| Welding position<br>(according to EN ISO 6947 and AWS/ASME) | PB / 2F<br>PD / 4F              |
| Torch diameter                                              | 16-22 mm<br>(0.63-0.87")        |
| Min. workpiece thickness                                    | 4 mm (0.16")                    |
| Ground clearance                                            | 4 mm (0.16")                    |
| Horizontal pulling force                                    | 150 N                           |
| Vertical pulling force                                      | 100 N                           |
| Horizontal speed *                                          | 0-110 cm/min<br>(0-43.3 in/min) |
| Vertical speed *                                            | 0-100 cm/min<br>(0-39.4 in/min) |
| Weight (w/o battery)                                        | 7.6 kg (22 lbs)                 |
| Product code                                                | WOZ-0735-10-00-00-0             |

\* With battery fully charged

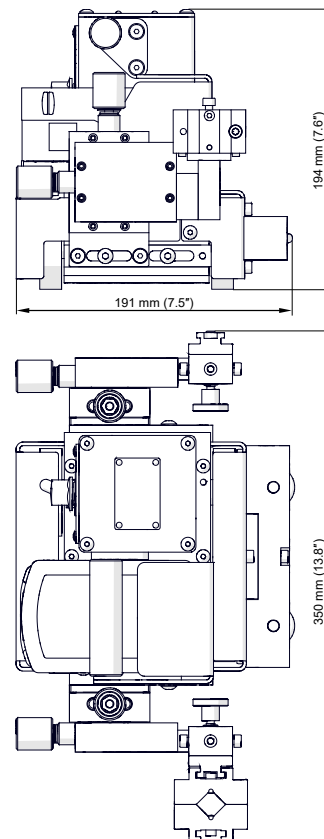

## Standard accessories:



Torch holder  
ZCS-0270-42-00-00-0



Battery 4.0 Ah  
AKM-0738-10-00-01-0  
(2 pcs included)



Battery Charger  
LDW-0738-10-00-30-0 (EU)  
LDW-0738-06-00-30-0 (AUS/NZ)  
LDW-0738-04-00-30-0 (UK)



Cable anchor  
UCW-0655-08-00-00-0



Auxiliary magnet blocks  
ZST-0655-09-00-00-0



Power cord 3 m (10 ft)  
PWD-0466-18-00-00-0 (230 V CEE)  
PWD-0466-16-00-00-0 (115 V USA)  
PWD-0466-23-00-00-0 (115 V UK)



Torch placement on either side



## Standard shipping set:

- Mini Spider tractor
- Foam-filled cardboard box
- Battery 4.0 Ah (2 pcs)
- 4 mm hex wrench
- 3 mm hex wrench
- Operator's Manual



**American Welding Society**  
Supporting Company Member

Mitglied im DVS - Deutscher Verband für  
Schweißen und verwandte Verfahren e. V.

**DVS** VERBAND

More information on [www.promotech.eu](http://www.promotech.eu)



PROMOTECH Sp. z o.o.  
ul. Elewatorska 23/1, 15-620 BIAŁYSTOK, POLAND  
tel. (+48 85) 678 34 05, fax (+48 85) 662 78 77  
marketing@promotech.eu www.promotech.eu

Your local dealer:

