

Migatronic TIG Adjust




The versatile TIG Adjust aircooled or watercooled torches allow you to weld in hard-to-reach locations.

Migatronic TIG Adjust provides full 360 degree-of-freedom!

TIG Adjust is designed for welding operations where repeated adjustments of the torch body are an everyday occurrence and use of conventional torches is physically impossible. The outermost part of the torch body can be turned in any direction and has almost unlimited life as opposed to a standard Flex torch.

The aircooled or watercooled TIG Adjust can be equipped with two different size torch bodies. The torch bodies can be equipped with standard wearing parts.

For the small torch body, standard wearing parts from the TIG 101-301 range can be used. For the large torch body, standard wearing parts from the TIG 201-401 range can be used. All wearing parts for these models can be used for TIG Adjust without limit. TIG Adjust is supplied without wearing parts as standard. TIG Adjust suits the two different size torch handles of the TIG Ergo range and all TIG Ergo control units are applicable. TIG Adjust is supplied in all 4 m and 8 m TIG Ergo models, but also offered in special lengths for regular orders. TIG Adjust can be ordered as a standard custom-built solution.

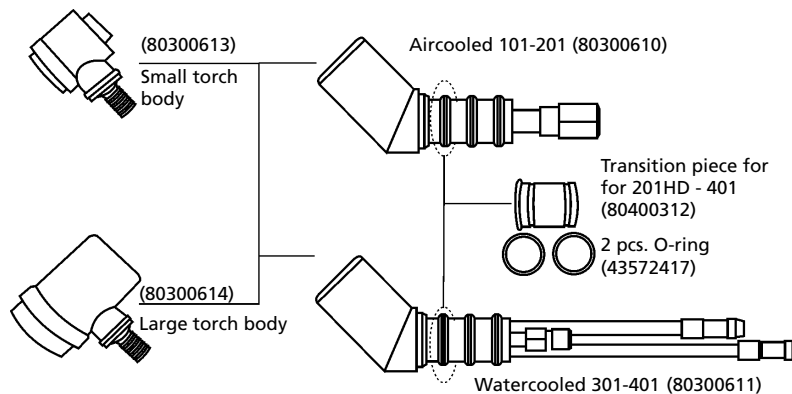

	Variant	Article no.
TIG 101 Small torch body 80300613	TIG 101 Adjust 4 m*	80392705
	TIG 101 Adjust 8 m*	80392706
	TIG 101R Adjust 4 m*	80392700
	TIG 101R Adjust 8 m*	80392701
TIG 201 Large torch body 80300614	TIG 201 Adjust 4 m*	80392845
	TIG 201 Adjust 8 m*	80392846
	TIG 201R Adjust 4 m*	80392847
	TIG 201R Adjust 8 m*	80392848

	Variant	Article no.
TIG 201 HD Large torch body 80300614	TIG 201 HD Adjust 4 m*	80392855
	TIG 201 HD Adjust 8 m*	80392856
	TIG 201R HD Adjust 4 m*	80392841
	TIG 201R HD Adjust 8 m*	80392842
TIG 301 Small torch body 80300613	TIG 301 Adjust 4 m*	80492190
	TIG 301 Adjust 8 m*	80492191
	TIG 301R Adjust 4 m*	80492185
	TIG 301R Adjust 8 m*	80492186

	Variant	Article no.
TIG 401 Large torch body 80300614	TIG 401 Adjust 4 m*	80492265
	TIG 401 Adjust 8 m*	80492266
	TIG 401R Adjust 4 m*	80492285
	TIG 401R Adjust 8 m*	80492286

* = 7 pole

